

eManager GPRS ACTIO 52

Main features

- ✓ High performance embedded system with Linux Yocto integrated (other on request)
- ✓ CPU, RAM and Flash memory ready to be the core of any Smart Project
 - ARM CORTEX-A7 700 Mhz
 - 256 MB DDR3 memory
 - 512 MB NAND flash memory
- ✓ GPRS, Wi-Fi and BT (optional)
- ✓ 5 Digital inputs and 2 Power relays
- ✓ Node-RED integrated





Description

eManager GPRS ACTIO 52 is an OEM industrial controller which is equipped with a high-performance control unit with a Linux Yocto embedded and Node-RED software integrated. The device includes RS-232/485 serial communications, an Ethernet 10/100 port, a Wi-Fi interface and GPRS communications. eManager GPRS ACTIO 52 GPRS is ideal for fog computing applications where monitoring, control and data sending is required. In addition, eManager GPRS ACTIO 52 is equipped with 5 digital inputs and 2 relays of 6A.

5 Digital inputs and 2 Power relays


- ✓ Configurable as dry contact (w/o internal tension) or wet contact (with internal tension)
- ✓ Inputs activation via external 0-24 VDC signal or internal ± 12 VDC power supply (for PNP or NPN sensors)
- ✓ Working modes: input, pulse counter and pulse width time counter. Pulse capturing up to 1 ms
- ✓ Maximum activation current of the relays of 6A

Dimensions

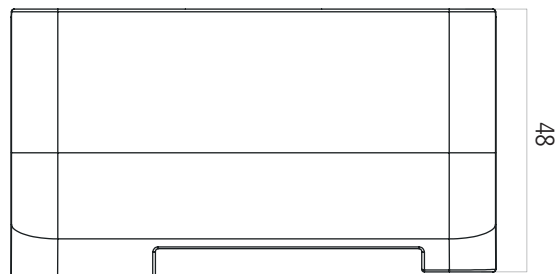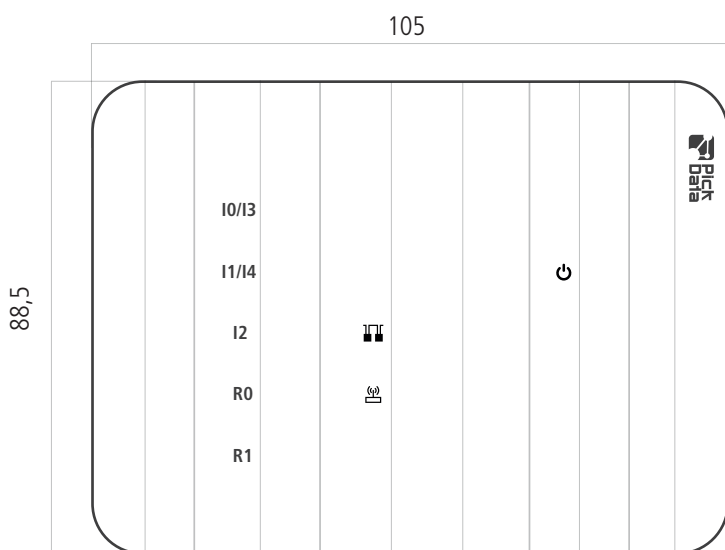

LEDs


LED	Name	Description
⏻	Power	Powered: Green
■	RS-232/485	Data transmission: Red Data reception: Green
Ⓜ	Modem	Connected with good signal: Static green Connected with weak signal: Blinking green Searching for connection / Without connection : Blinking red
I0/I3	Input 0/3	Input 0 activated: Blue Input 3 activated: Green Inputs 0 and 3 activated: White
I1/I4	Input 1/4	Input 1 activated: Blue Input 4 activated: Green Inputs 1 and 4 activated: White
I2	Input 2	Input 2 activated: Blue
R0	Relay 0	Activated: Blue No activated: None
R1	Relay 1	Activated: Blue No activated: None

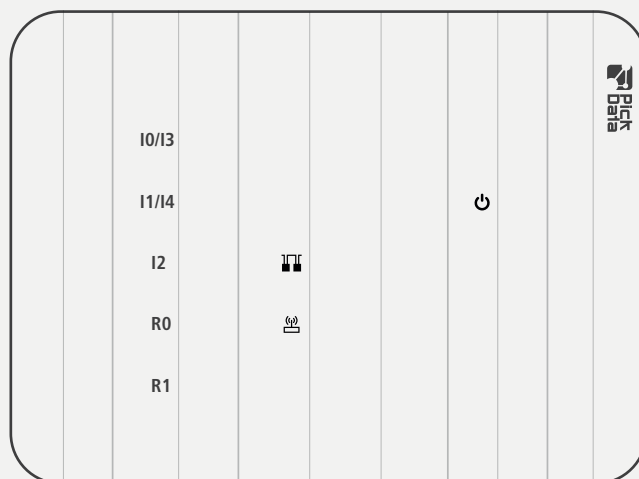

Technical features

Category	Parameters	Value
Power circuit	Power supply	85 ... 264 Vac / 120 ... 300 Vdc
	Frecuency	47 ... 63Hz
	Consumption (a.c. / d.c.)	8,8 ... 10,5 VA / 6,4 ... 6,5 W
Control unit	CPU	ARM Cortex-A7 700 Mhz
	RAM Memory	256 MB DDR3
	Flash Memory	512 MB NAND
	Clock	RTC with supercap to backup clock time
Environmental conditions	Operating temperature	-20 ... +50 °C
	Relative humidity	5 ... 95 %
	Maximum working altitude	2000 m
Mechanical characteristics	Enclosure material	UL94 polycarbonate - Self-extinguishing V0
	Protection grade	IP20 (assembled)
	Dimensions (Width x High x Length)	105 x 88,5 x 48 mm (6 DIN rail modules)
	Weight	160 g
	Mounting	DIN rail 46277 (EN 50022)
	Connectors	Pluggable terminals, max. wire section 1,5 mm ²
Electrical and safety features	Electric shock protection	Double-insulated class II
	Insulation	3 kVac
	Installation category	CAT III 300 V
Wireless interface	Wi-Fi	802.11 b/g/n (2.4 GHz)
	BT (optional)	4.2
Radio interface	Type	Quad-band GSM/GPRS
	Frequency bands	850 / 900 / 1800 / 1900 MHz
	Antenna	External
	Connector	SMA
Serial interface	Type	RS-232 (full-duplex) / RS-485 (half-duplex). Galvanic isolation
	Baud rate	9600...115200 bps
Network interface	Type	Ethernet
	Working speed	10/100 Mbps
Digital inputs	Type, number and voltage	5 digital inputs 0-24 Vdc
	Minimum voltage and current	0 Vdc / 160 µA
	Maximum voltage and current	30 Vdc / 12 mA
	Input sensitivity	0-7 Vdc : 0; 8-30 Vdc : 1
	Minimum pulse duration	1 ms
	Counters	5 counters of 32 bits / Freq. max 250 Hz
Relay outputs	Type	NO
	Max. operating parameters	6 A, 250 VCA, cos=1, 70°C
Standards	Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

Software platform

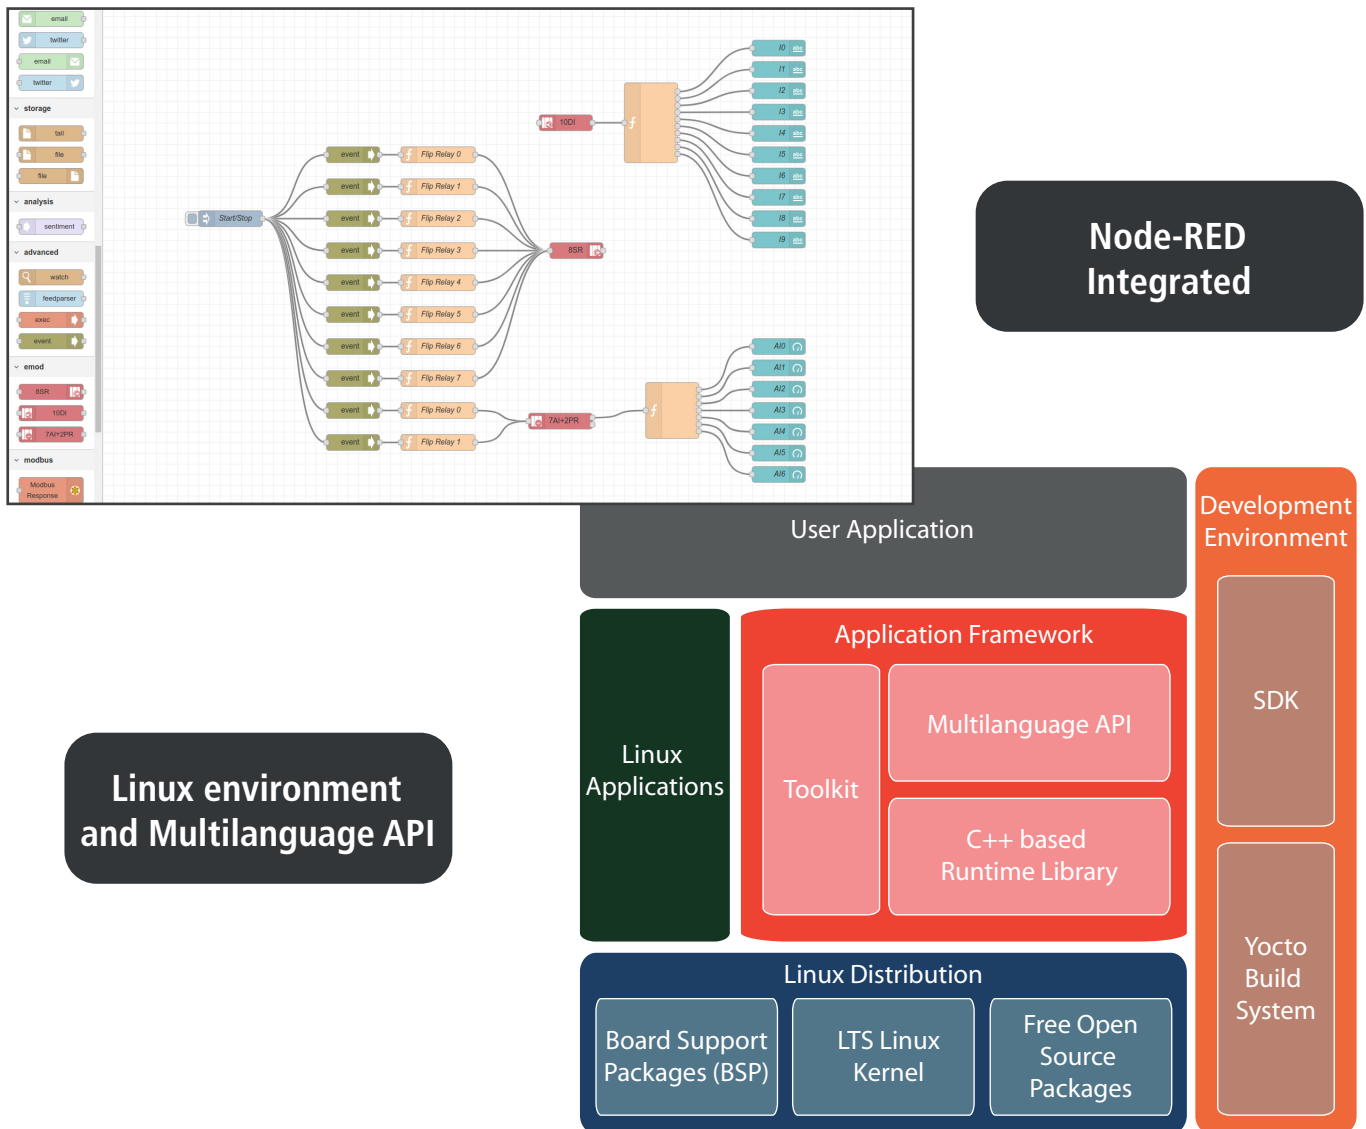

Description

eManager GPRS ACTIO 52 is equipped with a software platform designed for easily developing industrial and edge computing applications. With eManager GPRS ACTIO 52 you can smoothly develop your application with our multilanguage API which include the most popular programming language for IoT applications (C, C++, Python, Go, Java...). In addition, eManager GPRS ACTIO 52 fully integrates Node-RED which includes protocols such as Modbus, BACNET, MQTT, OPC-UA, together with easy communication with platforms like Amazon WBS, Microsoft Azure, Google Cloud and more.

Main features



**IoT open
software tools**



**Multilanguage
API**



**Public protocols
libraries**